

# Freeeko II Siren<sup>TM</sup>


## Universal Wireless Siren

Compatible with all wired & wireless panels

**Freeeko II**

High Range 868 Mhz  
Learn Mode Coding  
24 bit decoding  
Digital Processing  
Orange or Blue lens

Transceiver unit  
placed at the panel  
side, send and receive  
commands at over 200  
meters (at open space)

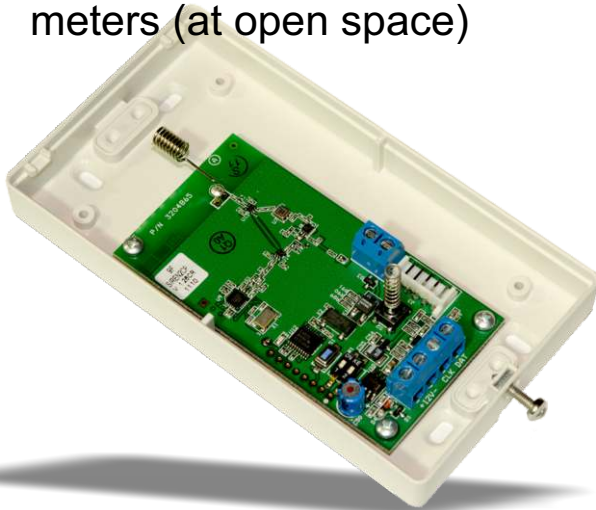

Outdoor/Indoor siren, IP-43, with over 102db sound level & LED Strobe

Transceiver unit provides interfacing to any alarm panel

Operates at the 868 MHz RF circuitry

Powered by none-rechargeable battery (3.6V/14Ah Lithium)

Battery test generate once a day

Foam Injection structure prevent foam injection tampering

Three ways tamper switche protected (Front Cover Screws  
and Back tamper)

Blue or Orange Strobe lens

Dimensions (H x W x D): 318 x 209 x 61 mm (12.5" x 8.2" x 2.4")

**Lithium Battery  
is included**



**AV-GAD**  
systems ltd.